

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

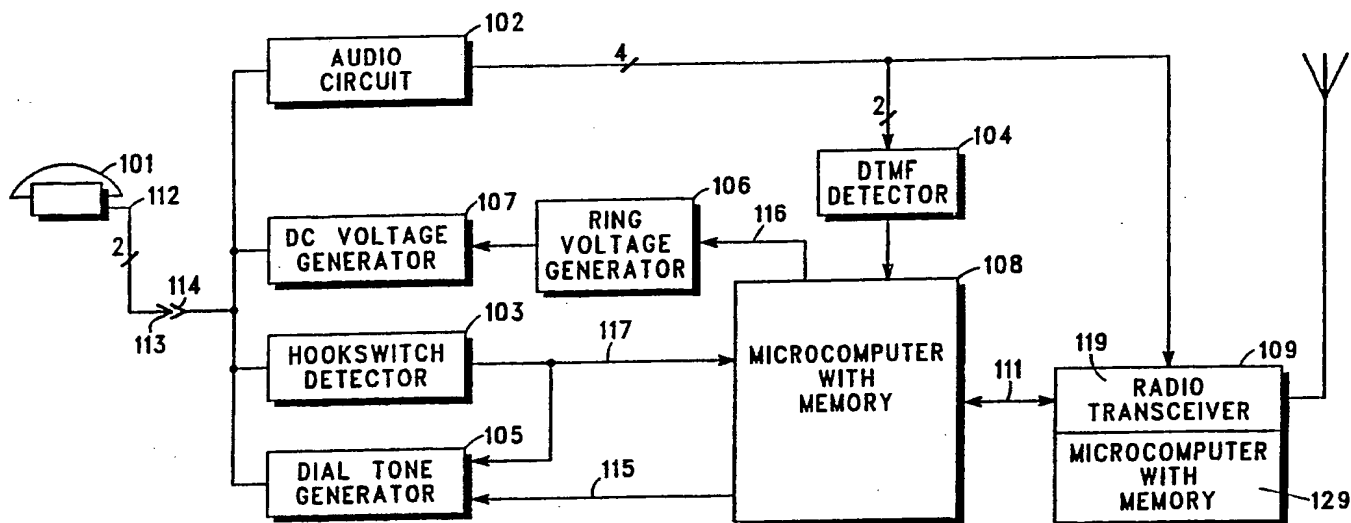
**THIS PAGE BLANK (USPTO)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>5</sup> : <b>H04M 11/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 90/14729</b>
			(43) International Publication Date: 29 November 1990 (29.11.90)
(21) International Application Number: PCT/US90/01797		(74) Agents: PARMELEE, Steven, G. et al.; Motorola, Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US).	
(22) International Filing Date: 4 April 1990 (04.04.90)			
(30) Priority data: 349,619 10 May 1989 (10.05.89) US 369,419 20 June 1989 (20.06.89) US		(81) Designated States: AT (European patent), AU, BE (European patent), BR, CA, CH (European patent), DE (European patent)*, DK (European patent), ES (European patent), FR (European patent), GB (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), NO, SE (European patent).	
(71) Applicant: MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).			
(72) Inventors: JOGLEKAR, Manohar, A. ; 946 Arkansas Drive, Elk Grove Village, IL 60007 (US). ASELTINE, Philip, F. ; 2215 N. Brighton, Arlington Heights, IL 60004 (US).		Published With international search report.	

(54) Title: CELLULAR TELEPHONE WITH STANDARD TELEPHONE SET



## (57) Abstract

A unique cellular telephone (100) connects to a standard telephone set (101) for providing cellular telephone services to subscribers in remote locations not served by a landline telephone system. Cellular telephone (100) includes a cellular telephone transceiver (109), microcomputer (108) and circuitry (102-106) for interfacing the cellular telephone transceiver (109) to the telephone set (101). The interface circuitry (102-106) provides the audio, voltage and dial signal interface to the telephone set (101). The microcomputer (108) controls the interface circuitry (102-106) and is responsive to the telephone set (101) for answering and placing cellular telephone calls.

### DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

#### *FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MC	Monaco
AU	Australia	FI	Finland	MG	Madagascar
BB	Barbados	FR	France	ML	Mali
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GR	Greece	NL	Netherlands
BJ	Benin	HU	Hungary	NO	Norway
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
DE	Germany, Federal Republic of	LU	Luxembourg	TG	Togo
DK	Denmark			US	United States of America

CELLULAR TELEPHONE  
WITH STANDARD TELEPHONE SET

5

Background of the Invention

The present invention is generally related to radiotelephones, and more particularly to a cellular  
10 telephone with a standard telephone set.

Cellular telephones currently are operated with a special purpose handset that is coupled via audio and data buses to a cellular telephone transceiver. In order to avoid use of a cellular radio channel during dialing and minimize  
15 costs of cellular telephone calls, cellular telephone users are required to dial a telephone number and then press a "SEND" button (pre-origination dialing), in order to place a cellular telephone call. Pressing the "SEND" button causes the cellular telephone handset to generate a "SEND" signal  
20 and append it to the dialed digits transmitted to the cellular telephone transceiver.

When a conventional pulse or tone dial telephone set or equivalent machine, such as a modem, is used in association with a cellular telephone, there is a need for  
25 either a "SEND" button or circuitry that simulates the "SEND" function. A "SEND" button can be added to a conventional telephone set by using a # or \* button or hookswitch flash, both requiring additional circuitry and/or software in an interface device.

30 A "SEND" button can also be simulated by detecting the end of dialing and automatically generating the "SEND" signal in the same manner as is done by the cellular telephone handset. Detecting the end of dialing and automatically generate the "SEND" signal is described in US

- 2 -

Patent Nos. 4,658,096, 4,737,975 and 4,775,997. According to these patents, an interface device detects the end of dialing and automatically appends a "SEND" signal to the dialed digits sent to the cellular telephone transceiver.

5 However, in order to detect the end of dialing, such interface device requires additional circuitry to determine how many digits the dialed telephone has and then count the number of dialed digits actually received. Thus, adding a "SEND" button or circuitry that simulates the "SEND"

10 function as in the prior art described above requires additional circuitry and increases the cost and complexity of the cellular telephone. For the foregoing reasons, there is a need for a cellular telephone which does not require generation of the "SEND" signal

15

#### Objects of the Invention

Accordingly, it is an object of the present invention to provide a unique cellular telephone for use with a

20 standard telephone set or equivalent device, which automatically places and receives cellular telephone calls.

It is another object of the present invention to provide a unique cellular telephone which processes digits of a telephone number dialed in any pattern on a standard

25 telephone set or equivalent device.

#### Brief Description of the Drawings

Figure 1 is a block diagram of a cellular telephone

30 100 embodying the present invention, into which a standard telephone instrument 101 may be plugged.

Figure 2 is a flow chart for the process used by microcomputer 108 in Figure 1 for processing dialed digits of a telephone number.

- 3 -

Figure 3 is a flow chart for the process used by microcomputer 108 in Figure 1 for processing incoming telephone calls.

Figure 4 is a flow chart for the process used by  
5 microcomputer 129 in cellular telephone transceiver 109 in Figure 1 for receiving dialed digits of a telephone number and placing a telephone call to the dialed telephone number.

#### Detailed Description of the Preferred Embodiment

10

Referring to Figure 1, there is illustrated a block diagram of a cellular telephone 100 embodying the present invention, into which a standard telephone set 101 may be plugged. Cellular telephone 100 may be advantageously  
15 utilized in remote locations for providing cellular telephone services to subscribers who can not obtain conventional landline telephone service. Telephone set 101 may be a conventional telephone instrument or equivalent device having either a pulse or tone dial. For example,  
20 telephone set 101 may be a desk set, wall set, modem, or a separate dial, ringer and handset of the type found in a phone booth. Telephone set 101 requires approximately twenty milliamps of operating current provided by cellular telephone 100 via two wires 112 typically referred to as  
25 "tip" and ring" wires. Telephone set 101 also typically includes a modular RJ11C plug 113 which couple to corresponding modular RJ11C receptacle 114 in cellular telephone 100.

Cellular telephone 100 includes a cellular telephone  
30 transceiver 109 with a radio transceiver 119 and microcomputer 129 with memory therein for controlling the operation thereof. Cellular telephone transceiver 109 may be any conventional cellular telephone transceiver having a radio transmitter, radio receiver and logic unit,

- 4 -

such as, for example, the transceiver shown and described in Motorola instruction manual number 68P81066E40, entitled "DYNATAC Cellular Mobile Telephone 800 MHZ Transceiver," published by and available from Motorola C & E Parts, 1313 East Algonquin Road, Schaumburg, Illinois 60196.

Cellular telephone 100 also includes blocks 102-106 for interfacing cellular telephone transceiver 109 to telephone set 101. Blocks 102-107 provide the audio, voltage and dial signal interface circuitry to telephone set 101 and may be conventional circuits of the type shown and described in Motorola instruction manual number 68P81071E30, entitled "THE CELLULAR CONNECTION Cellular Mobile Telephone Intelligent RJ11C Interface," published by and available from Motorola C & E Parts, 1313 East Algonquin Road, Schaumburg, Illinois 60196.

Voltage generator 107 generates a 48V DC voltage which is coupled to wires 112 for supplying approximately twenty milliamps of current to operate telephone set 101. Ring voltage generator 106 produces a ringing signal having a high voltage at a rate commonly used in telephone systems and being coupled via voltage generator 107 to telephone set 101. The rate of the ringing signal produced by ring voltage generator 106 is controlled by microcomputer 108 via control signal 116.

Audio circuit 102 is an electronic bridge circuitry which converts the two-wire balanced audio from telephone set 101 to four-wire unbalanced audio i.e., transmit and receive audio needed in a duplex telephone system. The four-wire unbalanced audio from audio circuit 102 is coupled to the radio receiver and radio transmitter of radio transceiver 119. The transmit audio from audio circuit 102 is also coupled to DTMF detector 104.



Hookswitch detector 103 detects the transition of telephone set 101 from "on hook" to "off hook" or vice versa and produces a hookswitch signal 117 having a binary zero state when telephone set 101 is on hook and a binary one state when telephone set 101 is off hook. During pulse dialing, the hookswitch signal 117 from detector 103 transitions from the binary one state to the binary zero state for each dial pulse. Hookswitch signal 117 from detector 103 is coupled to microcomputer 108 and dial tone generator 105. Microcomputer 108 monitors the hookswitch signal 117 from detector 103 to determine when telephone set 101 is off or on hook and to detect the digits of a pulse dialed telephone number.

Dial tone generator 105 is responsive to control signal 115 from microcomputer 108 and the hookswitch signal 117 from detector 103 for generating dial tone when telephone set 101 comes off hook. Dial tone is generated when the hookswitch signal 117 from detector 103 and control signal 115 from microcomputer 108 change to a binary one state. Upon detection of dialing, control signal 115 from microcomputer 108 changes from a binary one state to a binary zero state to shut off dial tone generator 105. In other embodiments, dial tone may be internally generated in microcomputer 108 and coupled to audio circuit 102 for application to telephone set 101.

DTMF detector 104 is coupled to the transmit audio from audio circuit 102 for detecting tone dialed digits of a dialed telephone number. Detector 104 may be a commercially available detector which translates dual-tone multi-frequency (DTMF) tones into a four-bit binary equivalent which is coupled to microcomputer 108 for processing. To select between tone or pulse dialed digits, an input signal to microcomputer 108 may be coupled to a binary zero or binary one by a jumper wire or a user-

programmable switch depending on the type of telephone set 101 coupled to cellular telephone 100.

Microcomputer 108 with memory therein controls blocks 105 and 106 and is responsive to hookswitch signal  
5 117 and digits dialed from telephone set 101 for answering and placing cellular telephone calls. On receipt of an incoming call, microcomputer 108 enables ring voltage generator 106 for ringing telephone set 101. If a call is initiated by telephone set 101 coming off hook,  
10 microcomputer 108 decodes the following pulse or tone dialed digits and, according to the present invention, forwards each digit on a real time basis to the microcomputer 129 of cellular telephone transceiver 109. Each dialed digit is stored by microcomputer 129. When  
15 microcomputer 129 detects the absence of dialed digits for a predetermined time, a cellular telephone phone call is automatically placed. Thus, by utilizing the present invention, there is no need to detect a specific number of digits (e.g. seven digits in local numbers and ten digits in  
20 long distance numbers) and no need to generate a "SEND" signal as was done in the prior art. As a result, cellular telephone 100 accommodates any dialing pattern regardless of the number of digits of the telephone number.

In the preferred embodiment, microcomputer 108 is  
25 coupled to microcomputer 129 of cellular telephone transceiver 109 by way of a three-wire data bus 111, which is illustrated and described in US Patent No. 4,369,516. Microcomputer 108 is essentially continuously looking for dialed digits and forwarding each digit on a real  
30 time basis to microcomputer 129. Each digit detected by microcomputer 108 is coded into a message and transmitted via bus 111 to microcomputer 129. Microcomputer 129 receives each dialed digit from bus 111 and stores the received digits in a pre-selected location of

its memory. If another digit is not received in a predetermined time (five seconds in the preferred embodiment), the digits stored in the pre-selected memory location of microcomputer 129 are transmitted via the cellular radio channels by the radio transmitter of radio transceiver 119 for initiating a cellular telephone call.

Referring next to Figure 2, there is illustrated a flow chart for the process used by microcomputer 108 in Figure 1 for processing dialed digits of a telephone number.

Entering at START block 202, the process proceeds to decision block 204, where a check of the hookswitch signal 117 is made to determine if telephone set 101 is off hook. If not, NO branch is taken to wait. If telephone set 101 is off hook, YES branch is taken from decision block 204 to block 206, where microcomputer 108 generates a binary one state of control signal 115 to generate dial tone. Block 206 may also be reached via branch A if an invalid telephone number has been dialed, as explained hereinbelow with respect to Figure 4. Next, at block 208, a check is made to determine if a digit has been dialed. If not, NO branch is taken to wait. If a digit has been dialed, YES branch is taken from decision block 208 to block 210 where a binary zero state of control signal 115 is generated and the dialed digit is coded into a message and sent via bus 111 to microcomputer 129. Next, at decision block 212, a check of the hookswitch signal 117 is made to determine if telephone set 101 is still off hook. If so, YES branch is taken back to decision block 208 to repeat the foregoing process. If telephone set 101 is not off hook, NO branch is taken from decision block 212 to block 214 to return to other tasks.

Referring next to Figure 3, there is illustrated a flow chart for the process used by microcomputer 108 in Figure 1 for processing incoming telephone calls. Entering at

- 8 -

START block 302, the process proceeds to decision block 304, where a check is made to determine if an incoming call has been received. If not, NO branch is taken to wait. If an incoming call has been received, YES branch is taken  
5 from decision block 304 to block 306, where microcomputer 108 generates a binary one state of control signal 116 to generate the ringing signal. Next, at decision block 308, a check of the hookswitch signal 117 is made to determine if telephone set 101 is off hook. If not, NO  
10 branch is taken to wait. If telephone set 101 is off hook, YES branch is taken from decision block 308 to block 310 to generate a binary zero state of control signal 116, connect the call and thereafter return to other tasks at block 312.

Referring next to Figure 4, there is illustrated a flow  
15 chart for the process used by microcomputer 129 in cellular telephone transceiver 109 in Figure 1 for receiving dialed digits of a telephone number and placing a cellular telephone call to the dialed telephone number. Entering at START block 402, the process proceeds to decision block  
20 404, where a check is made to determine if a dialed digit has been received in a message via bus 111 from microcomputer 108. If not, NO branch is taken to wait. If a dialed digit has been received, YES branch is taken from decision block 404 to block 406, where a five-second timer  
25 is reset and started. In the preferred embodiment, a five second timer implemented by interrupt based software is used to measure time elapsed since the last dialed digit was received. In other embodiments, such timer may be implemented by separate timing circuitry and may have a  
30 value which depends on operating characteristics of telephone set 101. Next, at block 408, the received digit is stored in a pre-selected location of the memory of microcomputer 129. Then, at decision block 410, a check is made to determine if another dialed digit has been received.

- 9 -

If so, YES branch is taken from decision block 410 back to block 406 to repeat the foregoing process. If another dialed digit has not been received, NO branch is taken from decision block 410 to decision block 412, where a check is

5 made to determine if the five-second timer has timed out. If not, NO branch is taken back to decision block 410 to check for receipt of the next dialed digit, if any. If the five-second timer has timed out, YES branch is taken from decision block 412 to decision block 418, where the dialed

10 digits are checked to determine if a valid telephone number has been dialed. For example, the dialed digits are checked to determine if seven digits are present for local numbers, ten digits are present for long distance numbers preceded by a one or zero, three digits are present for 411

15 information, 611 telephone repair and 911 emergency, and other digit sequences depending on the country and telephone system in which cellular telephone is being used. If the dialed digits are not valid, NO branch is taken from decision block 418 to branch A to return to the flow chart

20 of Figure 2 and generate dial tone again. Thus, according to a feature of the present invention, dial tone is returned to the user of cellular telephone if an invalid telephone number is dialed. If the dialed digits are valid, YES branch is taken from decision block 418 to block 414 where a

25 cellular telephone call is placed to the number comprised of the digits stored in the pre-selected memory location of microcomputer 129, and thereafter return to other tasks at block 416.

In summary, a unique cellular telephone automatically

30 places and receives cellular telephone calls dialed in any pattern on a standard pulse or tone dial telephone set or equivalent device. The dialed digits of a telephone number are processed by the unique cellular telephone of the present invention on a real-time basis resulting in

- 10 -

automatic placement of a cellular telephone call without using a "SEND" button or circuitry that simulates the "SEND" function as in the prior art.

Claims

1. Interface apparatus for coupling a cellular telephone operable on cellular radio channels to a telephone device having dialing means for dialing digits of telephone numbers, comprising:
- 5 data bus means having first and second ports, the first port being coupled to the cellular telephone;
- 10 interface means for coupling the telephone device to the cellular telephone, said interface means further including first control means coupled to the telephone device for receiving each entered digit and coupled to the first port of said data bus means for transmitting each received digit to the cellular telephone;
- 15 and
- said cellular telephone further including second control means and memory means, said second control means coupled to the second port of said data bus means for storing each transmitted digit in said memory means,
- 20 validating the stored digits when the elapsed time from receipt of the last stored digit exceeds a predetermined time interval, and transmitting the stored digits on one of the cellular radio channels when the stored digits have been validated.
- 25

- 12 -

2. The interface apparatus according to claim 1, wherein said interface means further includes means coupled to the telephone device and first control means for generating a ringing signal for ringing the telephone device.

5

3. The interface apparatus according to claim 1, wherein said interface means further includes means coupled to the telephone device and first control means for generating a dial tone signal.

10

4. The interface apparatus according to claim 1, wherein said interface means further includes means coupled to the telephone device for generating a DC voltage for powering the telephone device.

15

5. The interface apparatus according to claim 1, wherein said interface means further includes means coupled to the telephone device and cellular telephone for a coupling audio signals therebetween.

20

6. The interface apparatus according to claim 1, wherein said second control means validates the stored digits when the elapsed time from receipt of the last stored digit exceeds the predetermined time interval and transmits the stored digits on one of the cellular radio channel only when the stored digits have been validated.

25



- 13 -

7. A cellular telephone, comprising:  
a telephone device having dialing means for  
dialing digits of telephone numbers;  
cellular transceiver means operable on cellular  
5 radio channels for communicating cellular telephone calls;  
data bus means having first and second ports,  
the first port being coupled to said cellular transceiver  
means;  
interface means for coupling said telephone  
10 device to said cellular transceiver means, said interface  
means further including first control means coupled to the  
telephone device for receiving each dialed digit and coupled  
to the first port of said data bus means for transmitting  
each received digit to the cellular telephone;  
15 said cellular transceiver means further  
including second control means and memory means, said  
second control means being coupled to the second port of  
said data bus means for storing each transmitted digit in  
said memory means, validating the stored digits when the  
20 elapsed time from receipt of the last stored digit exceeds a  
predetermined time interval, and transmitting the stored  
digits on one of the cellular radio channels when the stored  
digits have been validated.

8. The cellular telephone according to claim 7,  
wherein said interface means further includes means  
coupled to the telephone device and first control means for  
generating a ringing signal for ringing the telephone device.

5

9. The cellular telephone according to claim 7,  
wherein said interface means further includes means  
coupled to the telephone device and first control means for  
generating a dial tone signal.

10

10. The cellular telephone according to claim 7,  
wherein said interface means further includes means  
coupled to the telephone device for generating a DC voltage  
for powering the telephone device.

15

11. The cellular telephone according to claim 7,  
wherein said interface means further includes means  
coupled to the telephone device and cellular telephone for a  
coupling audio signals therebetween.

20

12. The cellular telephone according to claim 7,  
wherein said second control means validates the stored  
digits when the elapsed time from receipt of the last  
stored digit exceeds the predetermined time interval and  
transmits the stored digits on one of the cellular radio  
channel only when the stored digits have been validated.

25

- 15 -

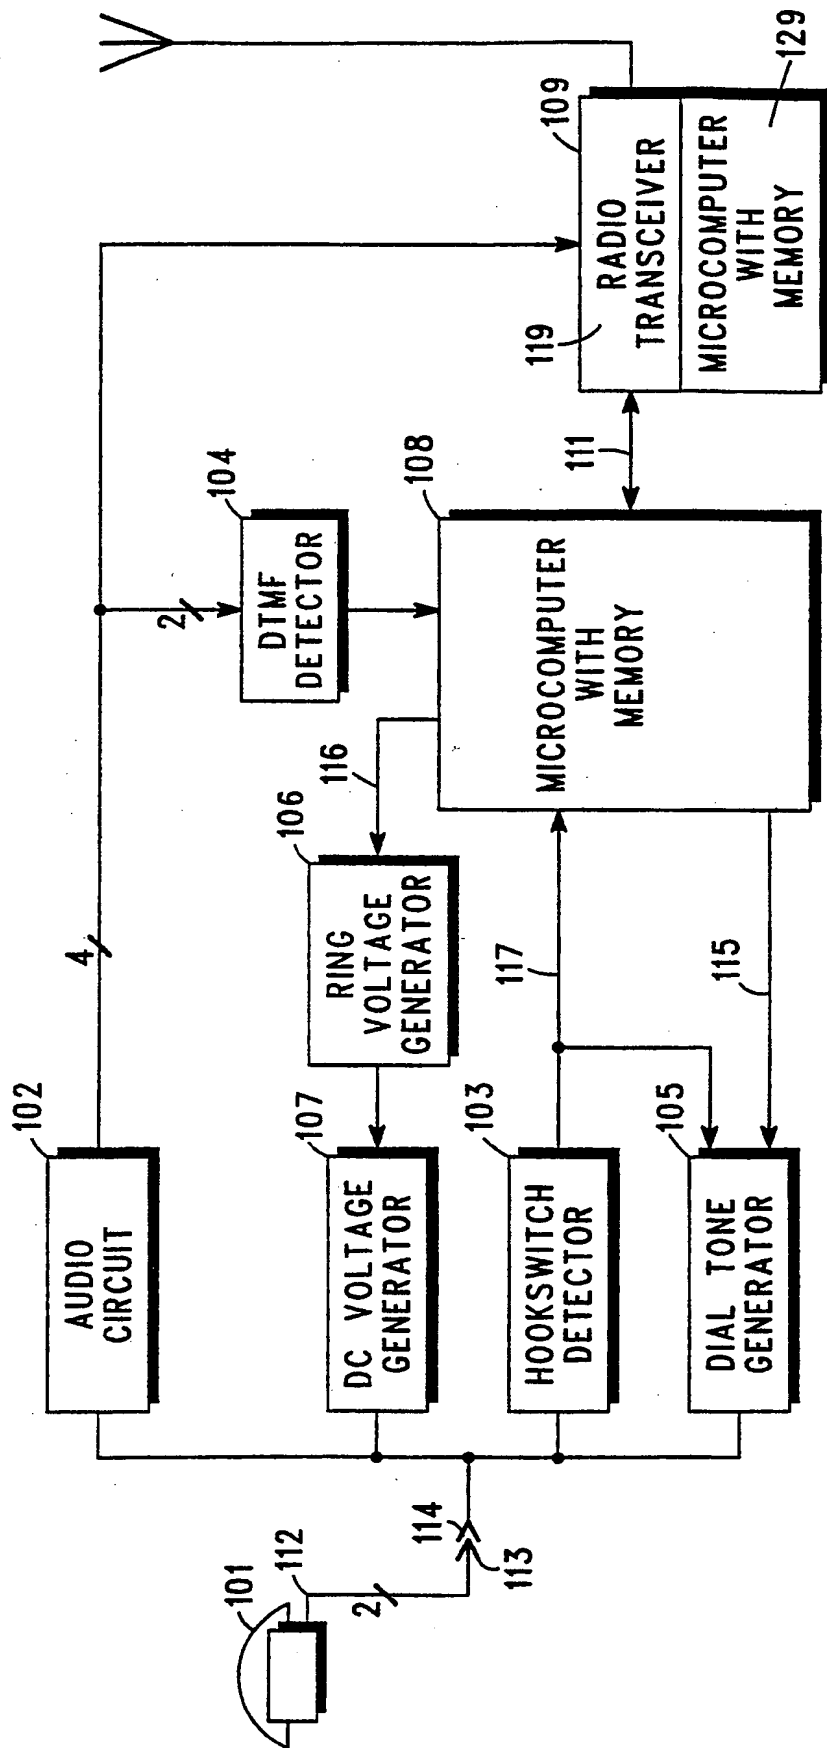
13. A method for processing cellular telephone calls dialed on a telephone device having dialing means for dialing digits of telephone numbers and being coupled to a cellular telephone, the cellular telephone including cellular transceiver means operable on cellular radio channels and having memory means, and the cellular telephone further including interface means for coupling the telephone device to the cellular transceiver means, said method comprising the steps of:
- 5                   in said interface means:
- receiving each entered digit; and
- transmitting each received digit to said cellular transceiver means and
- in said cellular transceiver means:
- 15                  receiving each transmitted digit from said interface means;
- storing each received digit in said memory means;
- validating the stored digits when the elapsed
- 20                  time from receipt of the last stored digit exceeds a predetermined time interval; and
- transmitting the stored digits on one of the cellular radio channels when the stored digits have been validated.
- 25

- 16 -

14. The method according to claim 13, further including the step of:

- validating the stored digits when the elapsed time from receipt of the last stored digit exceeds a
- 5 predetermined time interval; and
- said transmitting step transmitting the stored digits on one of the cellular radio channels only when the stored digits have been validated.




1 / 2



100

FIG. 1

2 / 2

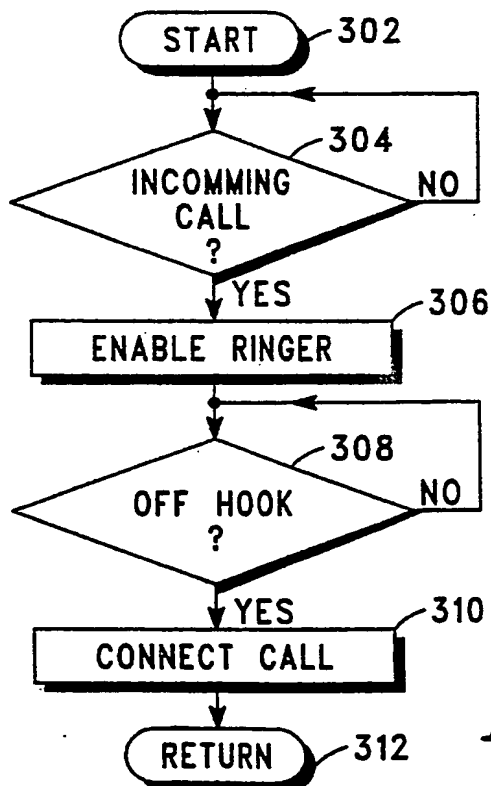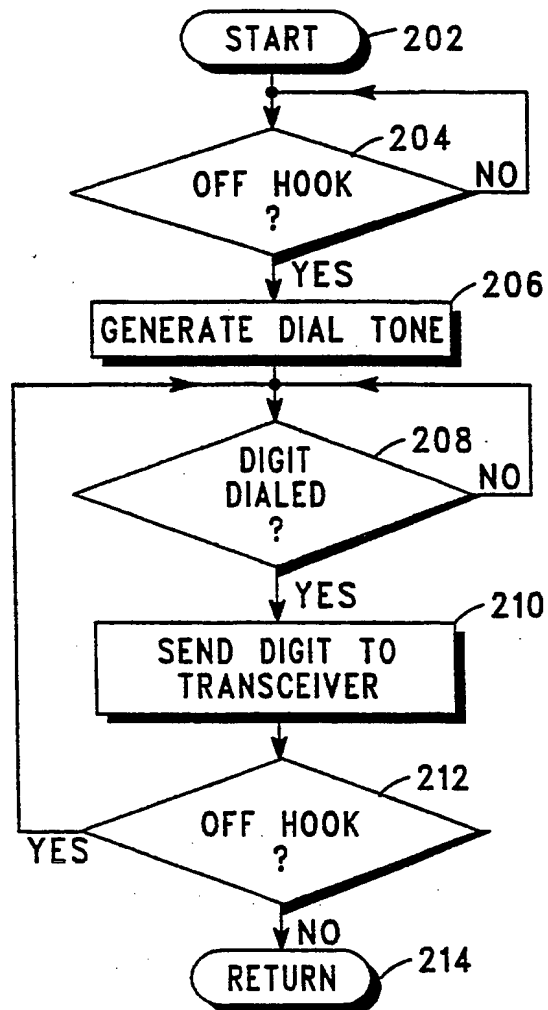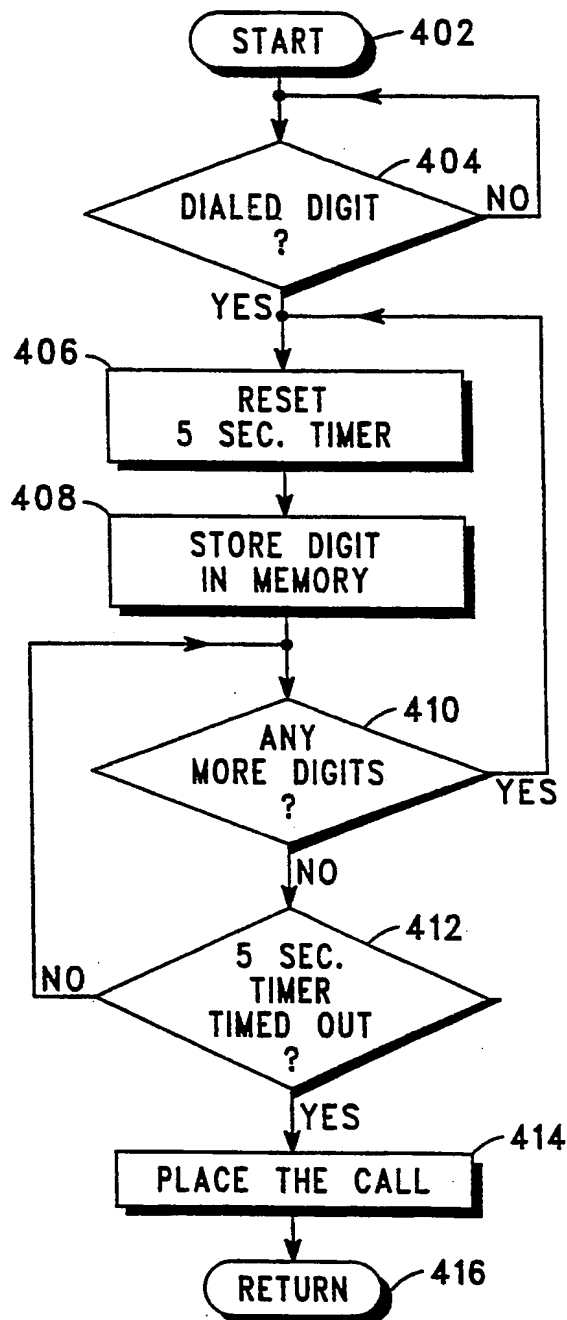*FIG. 2**FIG. 3**FIG. 4*

# INTERNATIONAL SEARCH REPORT

International Application No. **CT/US90/01797**

## I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all)<sup>3</sup>

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC (5): **H04M 11/00**

U.S. Cl.: **379/58, 59**

## II. FIELDS SEARCHED

Minimum Documentation Searched<sup>4</sup>

Classification System

Classification Symbols

U.S. **379/58, 59**

Documentation Searched other than Minimum Documentation  
to the Extent that such Documents are Included in the Fields Searched<sup>5</sup>

## III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>14</sup>

Category <sup>6</sup>	Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. 1 <sup>18</sup>
-----------------------	--	---------------------------------------

Y	US, A, 4,775,997 (West, Jr. et al.) 04 October 1988 See Figures 2 and 3A.	1-11
---	--	------

\* Special categories of cited documents:<sup>19</sup>

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

## IV. CERTIFICATION

Date of the Actual Completion of the International Search<sup>2</sup>

**07 June 1990**

International Searching Authority<sup>1</sup>

**ISA/US**

Date of Mailing of this International Search Report<sup>2</sup>

**17 AUG 1990**

Signature of Authorized Officer<sup>20</sup>

**NGUYEN NGOC HO**  
**INTERNATIONAL DIVISION**  
**January Augustus**

**THIS PAGE BLANK (USPTO)**